

# LEXRON36

25/50/75/100/125/150/200/205M

# LEXRON

Renewable Energy Systems

## LEXRON Solar Modules

### Features



Guaranteed 0- +5W positive power output tolerance ensures high reliability




Anti-reflective, hydrophobic coating improves light absorption and reduces surface dust



Excellent performance under low light environments (mornings, evenings and cloudy days)



Entire module certified to withstand high wind loads (2400 Pascal) and snow loads (5400 Pascal)\*

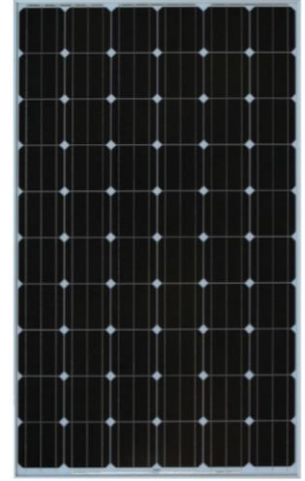

| PEAK POWER | OPEN CIRCUIT VOLTAGE<br>Voc(V) | SHORT CIRCUIT CURRENT<br>Isc(A) | PEAK VOLTAGE<br>Vmp(V) | PEAK CURRENT IMP<br>(A) | SIZE (mm)   | CELL NUMBER<br>(pcs) | NET WEIGHT<br>(kg) |
|------------|--------------------------------|---------------------------------|------------------------|-------------------------|-------------|----------------------|--------------------|
| LXR25M     | 23,80                          | 1,27                            | 20,70                  | 1,21                    | 430*360*25  | 36                   | 1,7                |
| LXR50M     | 23,80                          | 2,54                            | 20,70                  | 2,42                    | 430*670*25  | 36                   | 3,8                |
| LXR75M     | 23,80                          | 3,80                            | 20,70                  | 3,62                    | 600*670*25  | 36                   | 5,2                |
| LXR100M    | 23,80                          | 5,07                            | 20,70                  | 4,83                    | 800*670*25  | 36                   | 7,0                |
| LXR125M    | 23,80                          | 6,34                            | 20,70                  | 6,04                    | 970*670*30  | 36                   | 8,5                |
| LXR150M    | 23,80                          | 7,61                            | 20,70                  | 7,25                    | 1150*670*30 | 36                   | 9,0                |
| LXR200M    | 23,80                          | 9,99                            | 20,70                  | 9,66                    | 1505*680*30 | 36                   | 10,9               |
| LXR205M    | 23,80                          | 9,99                            | 20,80                  | 9,86                    | 1505*680*30 | 36                   | 10,9               |

### Industry-leading warranty

- 25 year transferable power output warranty: 10year/90%; 25year/80%.
- Based on nominal power.
- 10 year material and workmanship warranty.

**LEXRON® is registered trade mark of ACS Energy and Technology LTD STI**

Add : 1376 Sok. Boran Plaza No:3/AG Halkapınar, Izmir/Turkey

Tel: +90 232 458 0045

E-mail:info@acsenerji.com

www.acsenerji.com